


# AST 450-G2 30 34

Pyrometer with fiber cable for application in glass industry

## Overview

Digital pyrometers with USB or RS-485 interface

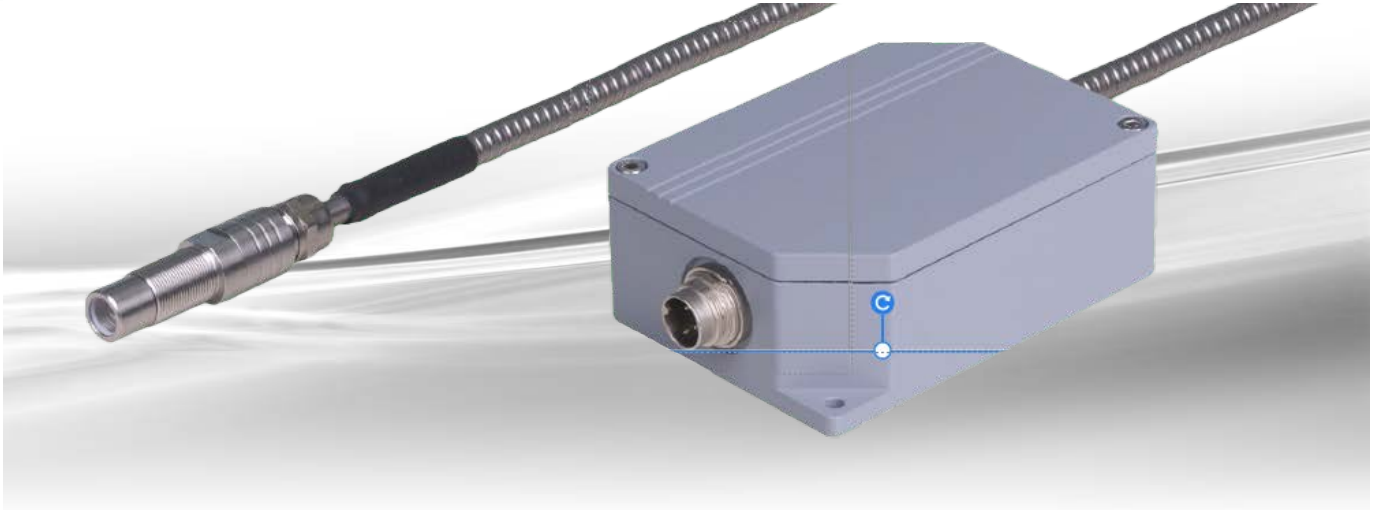

## Features

- For temperature measurements between 600 °C and 1800 °C
- Pyrometers specifically for glass industry
- Extremely robust aluminium housing
- Air purge unit with sighting tube for optical head
- Special mono fibre optics cable (length up to 30 m)
- Temperature linear standard output

## Description and applications

The digital pyrometers AST 450-G2 30 and 450-G2 34 are specifically designed for application in glass industry. Temperature measurement from 600 °C to 1800 °C in glass tank, working end, forehearth and feeder is easily realisable.

The solid construction in robust aluminium housing with special mono fibre optics cable (up to 30 m) allows usage even under rough environmental conditions and ambient temperatures of up to 250 °C.


Several air purge units with inconel tubes of different lengths are available for the special optical head and can be mounted together. The lens can be easily cleaned or replaced.

The temperature linear standard output signal (450-G2 30: 4 to 20 mA, 450-G2 34: 0/4 to 20 mA) allows easy implementation in existing measurement and control systems.

The device is equipped with a galvanically isolated interface (450-G2 30: USB, 450-G2 34: RS-485). Due to direct PC connection, parameters like sub range and response time can be easily adjusted by using the convenient parameterizing and evaluation software AST NET1.

Typical application areas:

- Glass temperature measurement:
  - in forehearth (1)
  - in feeder (2)
  - in glass tank (3)
- Temperature measurement of brickworks:
  - tank side walls (3)
  - in regenerator (4)
  - tank roof (3)

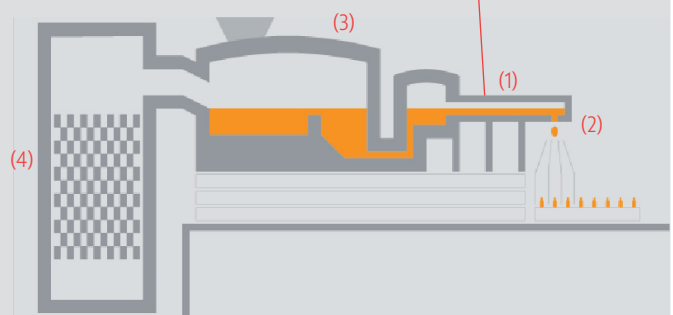

# AST 450-G2 30 34


Pyrometer with fiber cable for application in glass industry

## Technical data

Type (Order number)	450-G230 (4300040301)	450-G234 (4340040201)
Temperature range	600 °C to 1800 °C	600 °C to 1800 °C
Sub temperature range of analog output	adjustable within temperature range, minimum span 50 °C	
Spectral range	0.8 µm to 1.1 µm	0.8 µm to 1.1 µm
Optics	FOH-G, aperture diameter D = 11 mm	
Distance ratio	> 100 : 1	
Measurement uncertainty <sup>1</sup>	0.3 % of measured value in °C + 1 K	
Reproducibility <sup>1</sup>	0.1 % of measured value in °C + 0.5 K	
NETD <sup>1,2</sup>	0.1 K	
Response time t <sub>95</sub>	200 ms, adjustable from 10 ms up to 100 s	
Emissivity	0.05 to 1.00, adjustable in the device	
Test signal	12 mA, switchable at the device	10/12 mA, according to adjustment 0/4 to 20 mA, switchable at the device
Output	4 to 20 mA, temperature linear, max. burden 700 Ω at 24 V	0/4 to 20 mA <sup>3</sup> , temperature linear, max. burden 500 Ω
Interface	USB (galvanically isolated)	RS-485 (galvanically isolated), half duplex, Modbus RTU
Aiming	none	
Software	AST NET1 for Windows®	
Parameters	emissivity adjustable at the device, readout via software, response time, sub temperature range adjustable via interface and software	
Power supply	24 V DC ± 25 %	
Power consumption	max. 0.6 W	max. 1.5 W
Operating temperature	0 °C to 70 °C (pyrometer), up to 250 °C (fibre cable and optical head)	
Storage temperature	-20 °C to 70 °C	
Weight	appr. 500 g (without fibre cable and optical head)	
Dimensions	appr. 110 mm × 70 mm × 30 mm	
Housing	aluminium housing	
Safety class	IP 65 (according to DIN 40 050 and EN 60529)	
CE symbol	according to EU regulations (EN 50 011)	
Scope of delivery	AST 450-G2 30 or 450-G2 34, manual, inspection sheet, AST NET1 for Windows® (without connecting cable, fibre cable and optics, please order separately)	

<sup>1</sup> T<sub>0</sub> = 23 °C, r = 1, t<sub>95</sub> = 1 s. <sup>2</sup> Noise equivalent temperature difference. <sup>3</sup> Switchable via software.

## Dimensional drawing

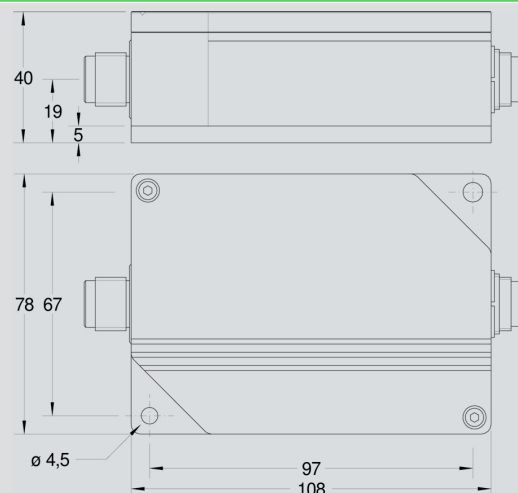


## AST 450-G2 30 34

Pyrometer with fibre cable for application in glass industry


Optics type FOH-G (Order number 3310A50090)

Measuring distance a [mm]	0	500	1000	2000	3000	4000	5000
	Measuring field diameter M [mm]						
450-G230 (600 °C to 1800 °C)	11.0	10.7	10.5	10.0	20.0	31.0	42.0
450-G234 (600 °C to 1800 °C)	11.0	10.7	10.5	10.0	20.0	31.0	42.0


Dimensional drawing FOH-G

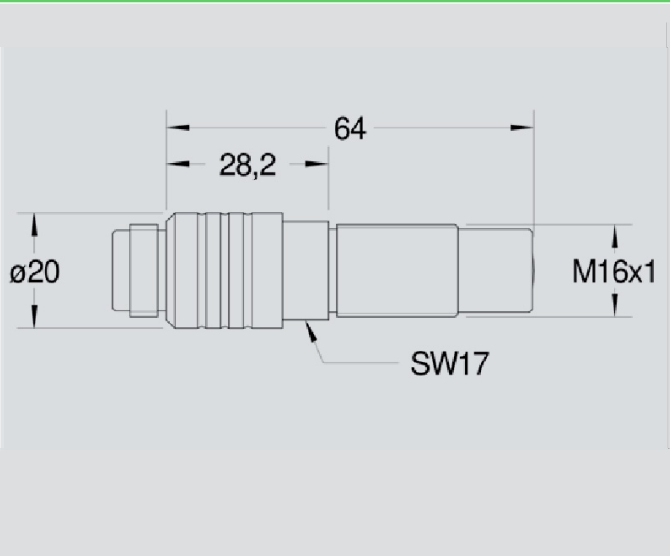

Measuring field optics FOH-G

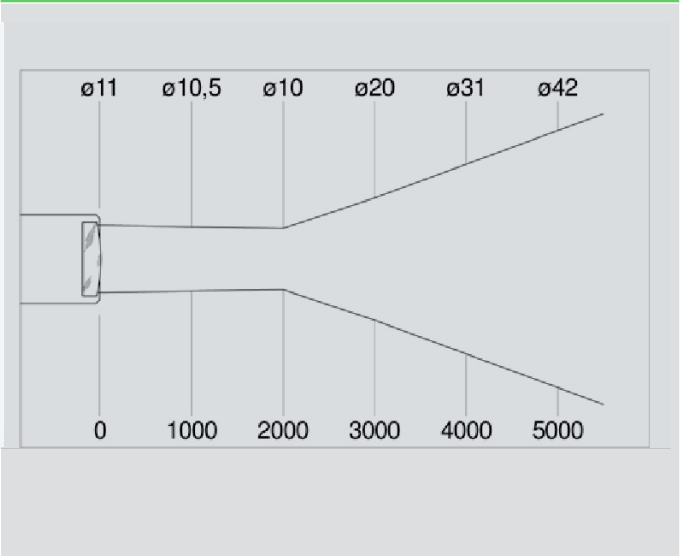

Inside view pyrometer

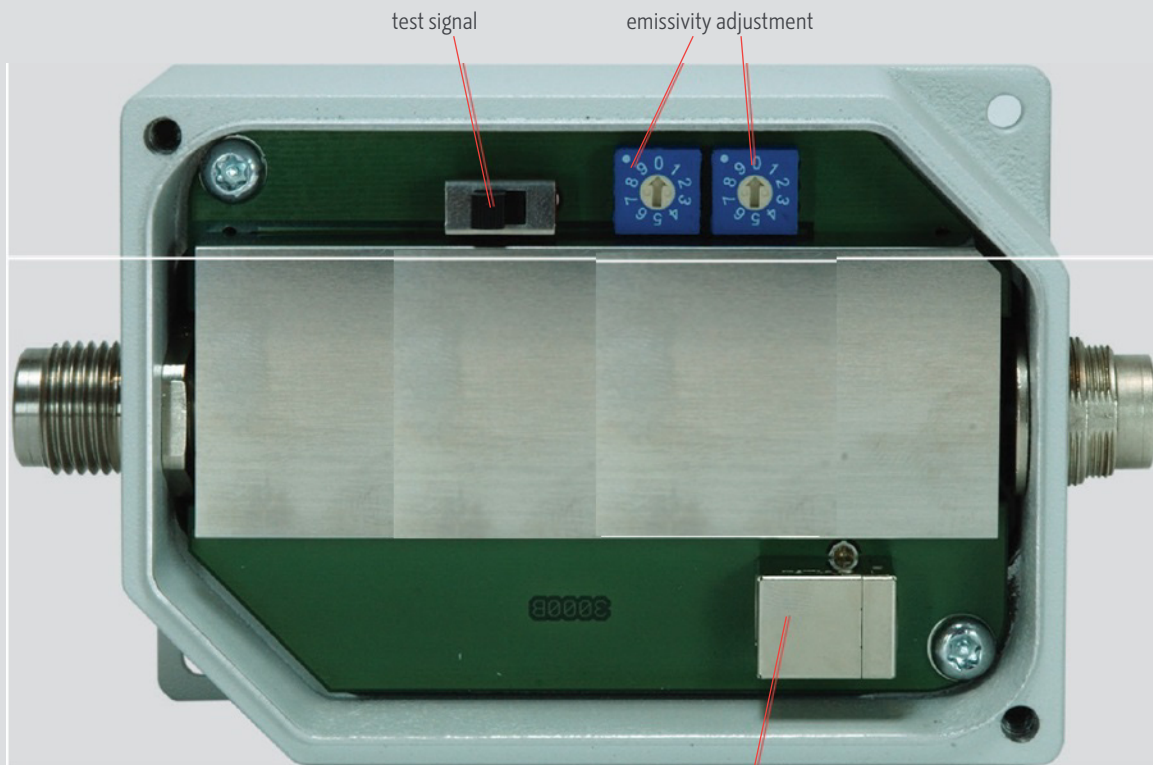

USB interface (AST 450-G2 30 only)

# AST 450-G2 30 34


## Pyrometer with fibre cable for application in glass industry

Accessories <sup>1</sup>			Order number	
Connection cable, 3 pin (450-G2 30)	Connection cable, 12 pin, straight plug (450-G2 34)	length 2 m	3310A15311	3310A11111
		length 5 m	3310A15312	3310A11112
		length 10 m	3310A15313	3310A11113
		length 15 m	3310A15314	3310A11114
		length 20 m	3310A15315	3310A11115
		length 25 m	3310A15316	3310A11116
		length 30 m	3310A15317	3310A11117
Fibre cable, stainless steel cable coating, twist proof		length 5 m	3310A42104	
		length 6 m	3310A42109	
		length 7,5 m	3310A42105	
		length 10 m	3310A42106	
		length 15 m	3310A42107	
		length 20 m	3310A42108	
Optical head		FOH-G	3310A50090	
Screw cap with lens		for FOH-G (spare part)	3310A21530	
Power supply PSU 15		24 V DC/0,6 A	3310A12010	
Air purge unit for FOH-G		including mounting angle	3310A22529	
Sighting tubes for air purge unit		inconel tube, 140 mm	3310A25010	
		inconel tube, 600 mm	3310A25020	
		ceramics tube, 300 mm, opened end	3310A25050	
		ceramics tube, 600 mm, opened end/closed end	3310A25060/3310A25070	

<sup>1</sup> More accessories available.

### Air purge unit and mounting angle

#### Example

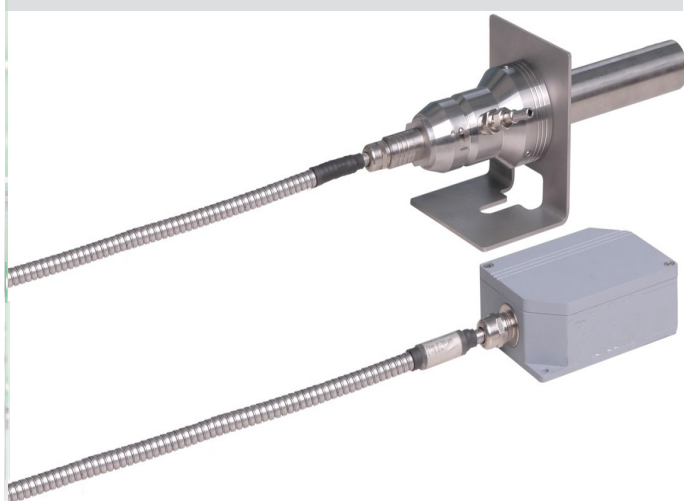


The Pyrometer is connected via fibre cable with the optical head and the air purge unit to the mounting angle and the sighting tube. Temperature measurements can be made through the sighting tube, for example at a furnace.

#### Air purge unit with mounting angle



#### Air purge unit with mounting angle and sighting tube

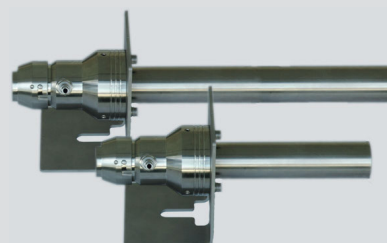

Technische Änderungen vorbehalten. Technical details are subject to change. 11.02.20

**ISO 9001**

Certified  
Quality Management System

www.tuv-sud.com/ms-cert

Phone: +972 4 9990025 Fax: +972 4 9990031

Email: sales@accuratesensors.com

Internet: www.accuratesensors.com

Accurate Sensors Technology  
Ltd. Turag house Blue street,  
Misgav Industrial Park Israel